


Matching Circuit

$Z_{in}=Z_{out}=50\ \Omega$
No matching required

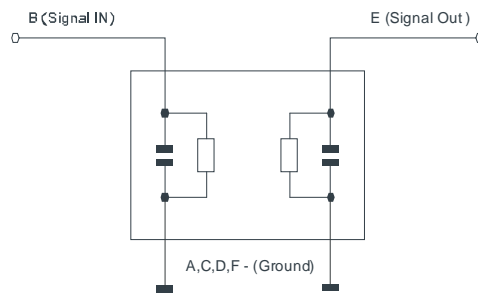

Additional Information

Temperature Range -55.. + 85 C
Substrate 36LTO
Package DCC6
Complies with Directive 2002/95/EC (RoHS)

Important Warnings

Electric Sensitive Device
See soldering chart before using
See frequency shifts depending on temperature

Links to Technical Information

Soldering profile: www.microware.fi/pdf/soldering-chart.pdf
Frequency shifts: www.microware.fi/pdf/frequency-shifts-table.pdf

Links to Company Information

Services: www.microware.fi/servicesandprices.php
Contacts: www.microware.fi/contacts.php