

## Low Loss SAW 286.2 MHz Filter



Bandwidth 4.2 MHz

Part Number M322-286.2M1

Complies with Directive 2002/95/EC (RoHS)

PRELIMINARY DATA

### Typical performance

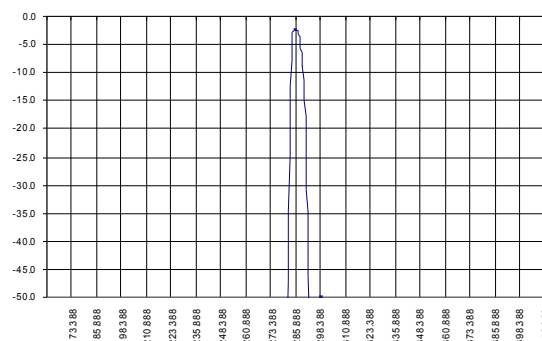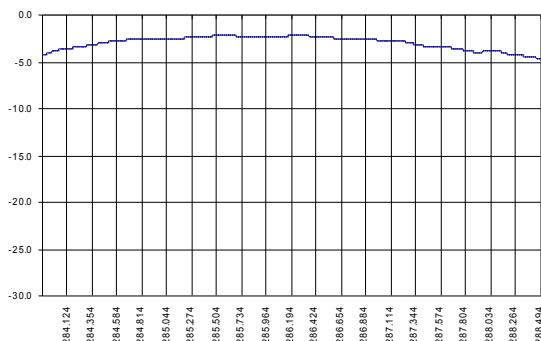


### Specifications

Parameter	Unit	Min	Typ	Max
Central frequency	MHz	285.9	286.2	286.5
Inserted loss (unmatched)	dB	1.8	2.0	2.2
Bandwidth @-2dB	MHz	4.0	4.2	4.5
Bandwidth @-40dB	MHz	9.8	10.1	10.4
Amplitude ripple (in bandwidth 2.5 MHz)	dB	-	0.7	1.0
Ultimate rejection	dB	-	55	-
Substrate	-	-	36LTO	-
Temperature range	°C	-55	22	85

#### Notes:

1. The design, manufacturing process, and specifications of this filter are subject to change.
2. Specification valid for measurements in Microsaw test fixture.

### Case

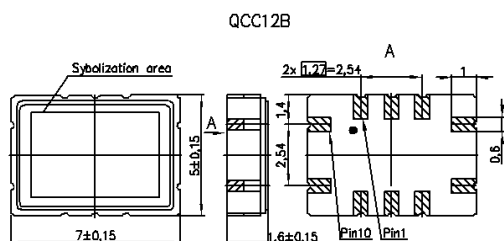

### Matching

