



# Low Loss SAW 1034 MHz Filter

Bandwidth 22 MHz

Part Number M133-1034M1

PRELIMINARY DATA

## Typical performance

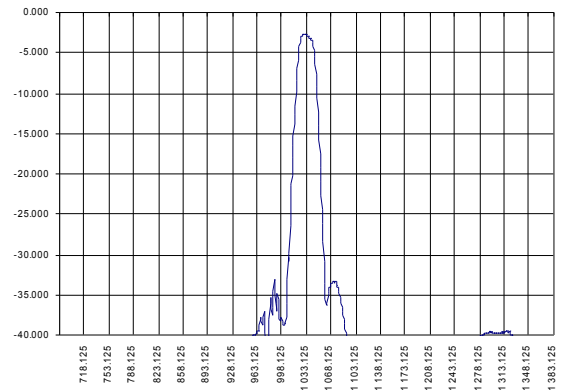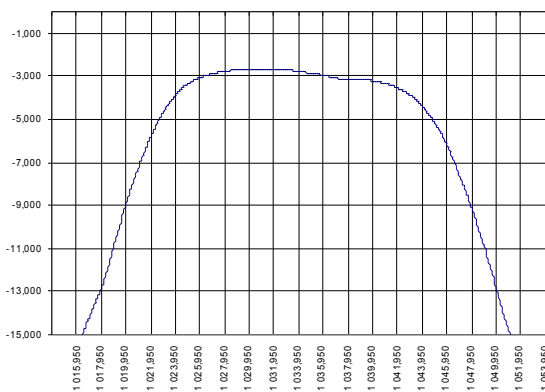


## Specifications

Parameter	Unit	Min	Typ	Max
Central frequency	MHz	1033	1034	1034
Inserted loss (unmatched)	dB	-	2.6	3.5
Bandwidth @-2dB	MHz	21	22	23
Bandwidth @-28dB	MHz	-	51	-
Amplitude ripple	dB	-	0.6	1.5
Ultimate rejection	dB	-	40	-
Substrate	-	-	36LTO	-
Temperature range	°C	-55	22	85

### Notes:

1. The design, manufacturing process, and specifications of this filter are subject to change.
2. Specification valid for measurements in Microsaw test fixture

## Case

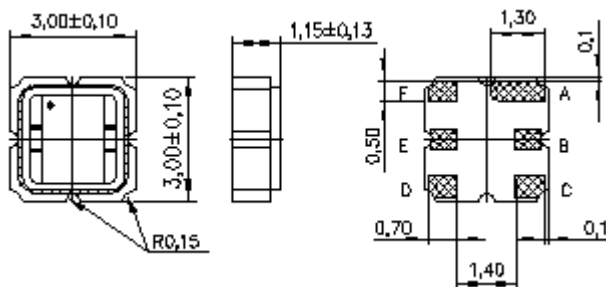

## Matching

