


# Low Loss SAW 1202 MHz Filter

Bandwidth 19 MHz

Part Number M141-1202M1

PRELIMINARY DATA

## Typical performance

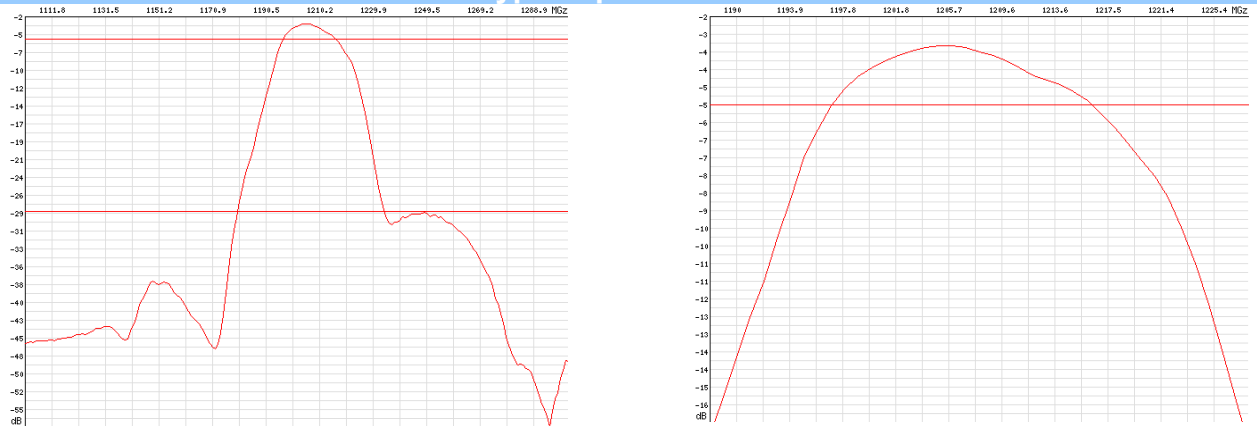


## Specifications

Parameter	Unit	Min	Typ	Max
Central frequency	MHz	1200	1202	1204
Inserted loss (unmatched)	dB	-	2.8	3.5
Bandwidth @-2dB	MHz	18	19	-
Bandwidth @-25dB	MHz	-	52	-
Amplitude ripple	dB	-	0.5	2.0
Group Delay variation	nsec	-	-	-
Ultimate rejection	dB	-	40	-
Substrate	-	-	36LTO	-
Temperature range	°C	-55	22	85

### Notes:

1. The design, manufacturing process, and specifications of this filter are subject to change.
2. Specification valid for measurements in Microsaw test fixture

## Case

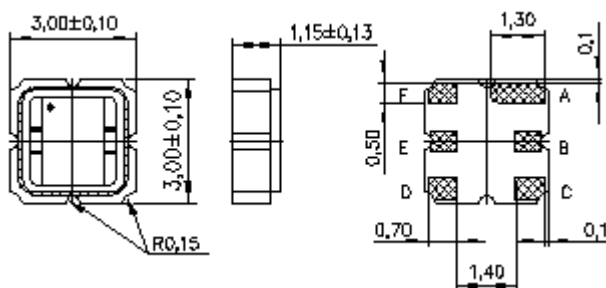

## Matching

