



Low Loss SAW 386 MHz Filter

Bandwidth 18 MHz

Part Number M055-386M2

PRELIMINARY DATA

Typical performance

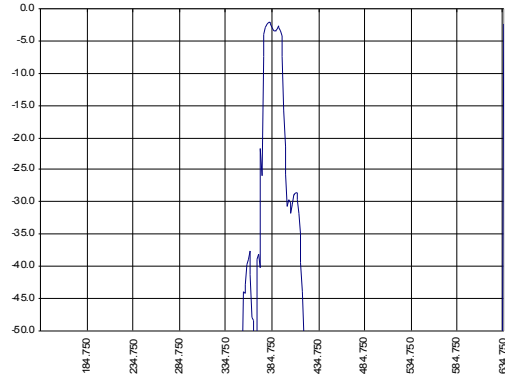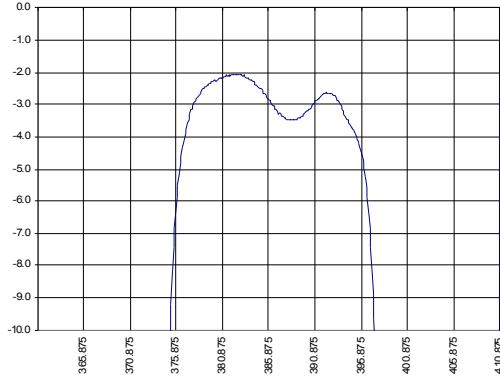


Specifications

Parameter	Unit	Min	Typ	Max
Central frequency	MHz	385.5	386	386.5
Inserted loss (unmatched)	dB	1.9	2.1	2.5
Bandwidth @-2dB	MHz	18	18.5	-
Bandwidth @-30dB	MHz	-	41	-
Amplitude ripple (in bandwidth 17 MHz)	dB	-	1.5	2
Ultimate rejection	dB	-	40	-
Substrate		-	64 LNO	-
Temperature range	°C	-55	22	85

Notes:

1. The design, manufacturing process, and specifications of this filter are subject to change.
2. Specification valid for measurements in Microsaw test fixture

Case

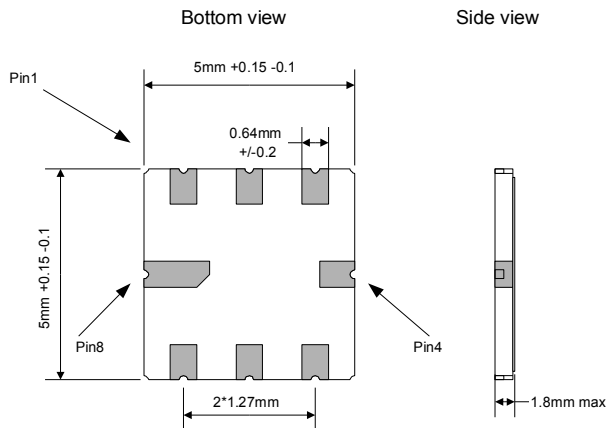

Matching

